




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : H03F 1/32		A1	(11) International Publication Number: WO 93/18581
			(43) International Publication Date: 16 September 1993 (16.09.93)
(21) International Application Number: PCT/EP93/00430		(74) Agents: DUNLOP, Hugh, Christopher et al.; Motorola, European Intellectual Property Operations, Jays Close, Viables Ind. Est., Basingstoke RG22 4PD (GB).	
(22) International Filing Date: 25 February 1993 (25.02.93)			
(30) Priority data: 9204497.3 2 March 1992 (02.03.92) GB		(81) Designated States: AT, AU, BB, BG, BR, CA, CH, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, PL, RO, RU, SD, SE, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD, TG).	
(71) Applicant (for all designated States except US): MOTOROLA LIMITED [GB/GB]; Jays Close, Viables Industrial Estate, Basingstoke RG22 4PD (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only) : WRAY, Antony, John [GB/GB]; 33 Scarlatti Road, Hatch Warren, Basingstoke RG22 4LY (GB). VALENTINE, Stephen, Thomas [GB/GB]; 204 Britten Road, Brighton Hill, Basingstoke RG22 4HR (GB). BRIDLE, Matthew, Quinton [GB/GB]; 6 Maggie Close, Kempshott, Basingstoke RG22 5QG (GB).		Published With international search report.	

(54) Title: RF POWER AMPLIFIER WITH LINEARIZATION

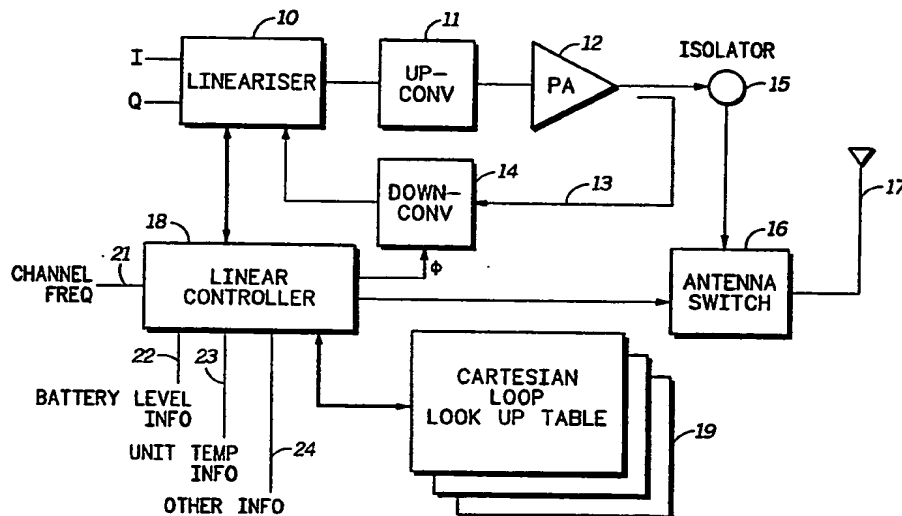

(57) Abstract

LINEARISER BLOCK DIAGRAM

A radio transmitter is provided comprising: a power amplifier (12); linearizing means (10) for maintaining linearity in the power amplifier; and feedback means (13) for feeding a signal from an output of the power amplifier to the linearizing means for maintaining linearity, said amplifier, linearizing means and feedback means forming a loop having adjustable loop linearization parameters (for example phase and gain); a look-up table (19) for storing predetermined loop linearization parameters; and control means having an operating condition input, said control means being coupled to the look-up table and the loop for selecting a loop linearization parameter in response to a transmit control signal according to an operating condition input, such as battery level or temperature, to the central means at the time of receipt of the transmit control signal. The invention also provides an adjacent channel receiver for monitoring the linearization and other factors.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TC	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

RF Power Amplifier with LinearizationField of the Invention

- 5 This invention relates to a radio frequency power amplifier employing a linearization technique.

Background of the Invention

- 10 Future mobile radio systems will be required to improve their spectral efficiency beyond that which currently exists today. This will mean that modulation schemes in which the information is carried in both the transmitted signal amplitude and phase will increasingly become required. In
15 order to conserve spectrum and to coexist with current radio systems the transmitters using these complex modulations will have to be linear. For example adjacent channel interference levels of $> -60\text{dBc}$ in a 25kHz channelisation may be required.

20 Summary of the Prior Art

One technique to achieve such power amplifier linearity performance is Cartesian feedback. This technique has become popular as it lends itself to integration on IC's.

- 25 The requirement for linearity (determined by adjacent channel interference limits) and maximum power efficiency, means that the power amplifier will have to operate as close to the gain compression (clip) point as possible, but still retain required level of linearity.

- 30 A known technique to measure and adjust for maximum phase margin of the closed loop system and to identify the clip point of the amplifier uses an appropriate training sequence. Gain compression is detected by an increase in the magnitude of the Cartesian loop error signal above a given
35 threshold. At this point the drive level control circuits are set appropriately and linear operation is assured - i.e. input signal is backed off.

The above technique is only suitable in future radio products where time is available for training prior to each

2

transmission. Time delays generally required to implement training are in the order of milliseconds. To allow this linearization technique to be implemented in systems where no training time is allocated, an alternative approach is
5 required.

In addition to achieving linearity through training, there is a need for improved methods of maintaining linearity.

10 Summary of the Invention

According to the invention, there is provided a radio transmitter comprising: a power amplifier; linearizing means for compensating for non-linearity in the power amplifier;
15 and feedback means for feeding a signal from an output of the power amplifier to the linearizing means for maintaining linearity, said amplifier, linearizing means and feedback means forming a loop having adjustable loop linearization parameters; a look-up table for storing predetermined loop
20 linearization parameters; and control means having an operating condition input, said control means being coupled to the look-up table and the loop for selecting a loop linearization parameter in response to a transmit control signal according to an operating condition input to the
25 central means at the time of receipt of the transmit control signal.

The loop linearization parameters may be phase and/or gain parameters.

The operating condition input may be channel frequency,
30 battery level, temperature or other information. A separate table may be stored for different values for each of these parameters. Thus, when operating at half the battery level, a table may be selected relating to that battery level.

There is preferably a temperature input receiving a
35 signal from a temperature sensor.

The tables preferably have settings for both phase and gain parameters.

In a particularly preferred feature of the invention, the look-up table is updated by measuring the actual loop

linearization parameter, selecting an improved linearization parameter and writing the improved parameter into the look-up table. In this manner, the accuracy of the look-up tables can be maintained with time. Moreover, by continuously
5 updating the look-up tables, it is not necessary to store as extensive a range of linearization parameters for different operating conditions.

A phase setting is particularly sensitive to changes in operating conditions and the look-up tables may contain more
10 phase parameter information than gain parameter information. In particular, if the phase margin can always be maintained at a maximum level, reduced adjacent channel splatter is observed.

For continuously measuring the phase and/or gain or
15 other parameter of the loop, it is particularly preferred that receiver means are provided tuned to an adjacent transmitter channel for measuring modulation on the adjacent channel.

The adjacent channel receiver means may take the form of
20 an adjacent channel receiver coupled to the output of the power amplifier and dedicated to the purpose of measuring the transmitter adjacent channel power. Alternatively, the adjacent channel receiver means may take the form of a receiver switchable between a first receive frequency which
25 is separated from the frequency of the signal from the power amplifier by a duplex separation frequency and a second frequency which represents the frequency of a channel adjacent to that of the signal from the power amplifier.

In the latter of the above embodiments of adjacent
30 channel receiver means, it is preferred that control means are provided for switching the receiver between a receive frequency on a receive timeslot and an adjacent channel frequency on a transmit timeslot and back to the receive frequency on a subsequent receive timeslot.

35 Attenuator means may be provided switchable into a path between the power amplifier and the adjacent channel receiver for attenuating the signal from the power amplifier to the adjacent channel receiver during transmission and for passing

4

an unattenuated signal from an antenna during a receive mode of operation.

Brief Description of the Drawings

5

Fig. 1 shows a block diagram of a radio transmitter with power amplifier and linearizer in accordance with a first embodiment of the invention.

Fig. 2 shows a block diagram of a radio transmitter with power amplifier and linearizer in accordance with a second embodiment of the invention.

Fig. 3 shows switched attenuator circuit for switching into the circuit of Fig. 2 at point (b).

Fig. 4 shows a TDMA timing format in which the invention may be employed.

Detailed Descriptions of the Preferred Embodiments

Referring to Fig. 1, there is shown a radio transmitter comprising a linearizer 10, an upconverter 11, a power amplifier 12, a feedback loop 13, and a downconverter 14. The output of the power amplifier 12 is connected via an isolator 15 and an antenna switch 16 to an antenna 17. A linear controller 18 is provided connected to the linearizer 10, the downconverter 14 and the antenna switch 16. Connected to the linear controller 18 is a series of look-up tables in memory 19. The linear controller 18 has a number of inputs of which a channel/frequency input 21, a battery level input 22, a unit temperature input 23 and other information inputs 24 are shown.

On accepting a request for transmission from a push-to-talk (PTT) switch (not shown) or otherwise, the transmitter power amplifier 12 is turned on. The various operating parameter inputs 21, 22 and 23 are measured by the controller 18 and a look-up table 19 is selected for the measured conditions. Thus, for a particular channel, battery level and measured temperature (as indicated by a temperature sensor), predetermined gain and phase settings will be downloaded from the look-up table 19.

The linearizer phase shift and drive level attenuator settings, which are described in more detail in the paper "Transmitter Linearization using Cartesian Feedback for Linear TDMA Modulation" by M Johansson and T Mattsson 1991, IEEE are set in the downconverter 14 and the linearizer 10 respectively by the linear controller 18 depending on the values read from the look-up table 19. The antenna switch 16 is at this point operated using an appropriately controlled ramp signal, having a raised cosine profile, to avoid excess splatter to adjacent channels. Transmission of the information (data or voice) defined by I and Q samples input to the linearizer 10 now takes place in a stable linear operation.

The values in the look-up table 19 are set in the factory by extensive testing at different temperatures battery levels, etc.

In a more preferred embodiment of the invention, the values in the look-up table are updated as the radio is used.

For a given transmission request, the loop phase and gain parameters read from the look-up table 19 are those set in the look-up table from a previous transmission on the channel in question at the battery level and temperature in question. When these values have been loaded into the linearizer 10 and transmission begins, a comparison is made between the I and Q values input and those received on the feedback loop 13 from the downconverter 14. Based on a comparison of these values, a decision is made as to the need for updating the loop phase and gain parameters. If, for example, the phase margin has decreased, a new phase setting is calculated to increase the phase margin for the loop. This new phase setting is now written into the particular location in the look-up table 19 for the current channel, battery level and temperature settings and replaces the previously existing value. The new value will be used next time a transmission is requested on that channel at that battery level and at that temperature.

An assumption is made that changes in loop phase and gain characteristics due to battery voltage and temperature are independent of one another. This allows separate look-up

6

tables to be used for different battery voltage settings and temperature settings. It is found that this is a workable assumption, however, more extensive look-up tables can be stored for particular battery level and temperature pairs.

- 5 The memory 19 can be arranged in other formats. Interpolation may be carried out between values, e.g. values for measurements at two temperature when the temperature sensor senses an intermediate temperature.

- To allow for the linearizer adjustment, the ramp signal
10 to the antenna switch is delayed by an appropriate amount Δt ; this is to compensate for the look-up table access time and downloaded to the linearizer circuitry. This delay is assumed to be minimal in comparison with the ramp time of the antenna switch. Therefore when the antenna is connected to
15 the power amplifier output, the power amplifier is operating at the correct level to ensure compliance with required interference specifications.

- As an alternative to sensing of loop gain and phase settings and refreshing the look-up table entries after each
20 transmission, a retraining sequence can be input to the linearizer 10 and transmitted out of the antenna 17, or into a load as described in co pending UK patent application entitled "Radio Transmitter with Linearization Training Sequence" file don the same date as the present
25 application, or transmitted into an adjacent channel receiver as is described below.

- The sensing of loop gain and phase settings and refreshing of the look-up table entries after each transmission does not incur a time penalty and allows the
30 transmitter to be available at all times. The values in the tables can be refreshed when a measured value deviates from a stored value by more than the predetermined amount, or they can be refreshed at regular intervals.

- If retraining is used, this can be implemented by
35 refreshing the look-up table entries on every power-up of the radio, by refreshing the look-up table entries at fixed intervals of operation in terms of absolute time or transmission time, or refreshing the look-up table entries at intervals dictated by radio transmitter conditions.

7

Loop phase and drive level settings are monitored and adjusted during transmission to take into account changing device characteristics and the linearized power amplifier is optimized for both stability and efficiency. The transmitter efficiency is maximized by operating the power amplifier as close to its gain compression point as possible, as described in US Patent Application No. 606679 of Motorola Inc, annexed hereto as "Annex 1". The transmitter, however, is restricted by the amount of adjacent channel interference it should be allowed to generate. For maximum efficiency the transmitter must operate as close to the adjacent channel interference limit as possible. It would be desirable to provide an improved means for performing a "clip detect" operation to find the optimum setting of loop gain for the feedback network.

An arrangement is shown in Fig. 2 which meets the above need and comprises a number of elements already described with reference to Fig. 1. In Fig. 2, there is shown a microprocessor 30 which controls the gain (A) and phase (ϕ) of the feedback loop. In Fig. 2, a phase adjuster 31 is shown separate to the linearizer 10, as is a feedback phase detector 32. It will be appreciated that these elements are present in the circuit of Fig. 1, but are merely encompassed within the linearizer block 10 of Fig. 1.

In addition to the above elements, the circuit of Fig. 2 has an adjacent channel receiver 33, or in a further embodiment, as an alternative to adjacent channel receiver 33, a subscriber receiver 34 is provided with a control input from microprocessor 30 for changing the receive frequency of the subscriber receiver 34 from a receive mode (for receiving voice/data from the antenna 17) to an adjacent channel receive mode for measuring adjacent channel receive power.

Referring to the first of these alternative embodiments, the adjacent channel receiver 33 is connected to the output of the power amplifier 12 and comprises an attenuator, a downconverter to a suitable IF frequency, a mixer which taps a signal from a main synthesizer for the radio, an IF filter, an attenuator, a rectifier and means for measuring voltage across the rectifier. A ceramic filter is suitable for the

8

IF filter. This ceramic filter is a 25 KHz bandpass filter tuned to a frequency 25KHz offset from the IF signal for the corresponding transmit channel.

In the second embodiment shown in Fig. 2 in which the subscriber receiver 34 changes between a receive mode and an adjacent channel receive mode, operation will be described with reference to a TDMA system having 60 millisecond frames divided into 4 timeslots of 15 milliseconds each as shown in Fig. 4. A transmit frame is always offset from a receive frame and vice versa. A channel pair may comprise the first timeslot of the transmit frame and the first timeslot of the receive frame or the second timeslot of the transmit frame and the second timeslot of the receive frame etc. There will always be about 15 milliseconds between the end of a transmit timeslot and the beginning of a receive timeslot. This provides ample time for the microprocessor 30 to provide a control signal to the synthesizer of the subscriber receiver 34 to cause a receive frequency change equal to the duplex frequency separation between the transmission receive frequencies less (or in addition to) an amount equal to the channel spacing. Where the duplex frequency separation is 10MHz, and the channel separation is 25 KHz, the signal from the microprocessor causes the receiver 34 to change its receive frequency through 9.975 MHz or 10.025 MHz. After a receive frame, the receiver 34 changes its frequency to be adjacent that of the signal being transmitted from power amplifier 12 in a transmit frame and, after transmission, it switches back to its appropriate receive frequency for receiving the next timeslot from the antenna 17.

While the adjacent channel receiver 33 or the re-tuned subscriber receiver 34 is tuned to the adjacent channel, it is able to measure the power on the adjacent channel. If the level of signal on the adjacent channel exceeds a threshold, for example a threshold of 60 or 63 dB below the output level of the power amplifier 12, this is an indication of onset of clipping in the power amplifier 12 and an indication that it is necessary to back off the gain of the power amplifier 12. Thus, the adjacent channel receiver 33 or the subscriber receiver 34 provides a signal to the microprocessor 30 from

which, if onset of clipping is detected, controls the linearizer 10 to reduce the gain A.

As a result, with a real-time knowledge of the splatter to adjacent channel power, backing off made to the drive level to the power amplifier can be minimised at all times ensuring true optimum operating efficiency. In addition, the arrangement ensures a predetermined maximum splatter into the adjacent channel at all times.

On detecting of clipping and backing off of the power amplifier, the new value for the loop gain (a) can be loaded into the look-up tables of Fig. 1.

The adjacent channel receiver of 33 or subscriber receiver 34 can be used for detecting "clip" during a training sequence such as that described in US Patent No. 5066923 of Motorola Inc. During the training sequence, the energy of the power amplifier is diverted into the adjacent channel receiver 33 or the subscriber receiver 34 by isolation of the antenna 17 using the antenna switch 16. This allows the energy to be directed away from the antenna ensuring "off-air" training and no on-air adjacent channel splatter. It is proposed that this transmit energy whilst training is diverted into the appropriate receiver by the microprocessor 30 controlling the antenna switch 16. This can be achieved by:

- (1) coupling of some of the feedback signal power into a separate receiver tuned to the adjacent channel or
- (2) short circuiting the antenna switch into the subscriber unit receiver and switching the down-converter local oscillator frequency by the duplex separation frequency plus or minus the channel bandwidth, therefore allowing the standard receiver to perform a received signal strength indication on the adjacent transmit channel.

In the case of a short circuited implementation, suitable attenuation of the transmitter power is required to avoid over driving the receiver. This is implemented by appropriate switching of receiver paths 40 and 41 as shown in Fig. 3. Receiver path 40 provides a path from the antenna 17 to the receiver 34. Adjacent channel receive path 41 provides a path in the case of routing of the signal from the

10

power amplifier 12 to the receiver 34. The circuit comprises three pin diode switches 16, 43 and 44 under control of the microprocessor 30. An attenuator 45 is provided in the adjacent channel receive path 41, having a suitable value to avoid overdriving the receiver circuitry. The operation is as follows. Simultaneously with the switching of the antenna switch 16 by the microprocessor controller 30, the controller 30 causes pin diode switches 43 and 44 to switch from path 40 to path 41, thus switching attenuator 45 into the path to protect the receiver. The timing can be arranged such that attenuator 45 is always switched into the path before antenna switch 16 switches

The measurement of the adjacent channel power in the adjacent channel receiver can be accomplished by any of the standard methods available. One of which is to use an FFT of the received signal, and then processing this data to obtain a measurement of the adjacent channel power. The generation of the transmit spectrum has the advantage over the previously described method of using the a separate adjacent channel receiver for measuring the adjacent channel power as it is able to monitor both adjacent channels simultaneously.

The invention also allows a method of real-time monitoring of the phase shift around the feedback loop, thus allowing the loop phase to be adjusted whenever required, ensuring stability at all times. This technique can be utilised to reduce the phase margin normally designed into such feedback systems, therefore creating an opportunity to increase the loop gain and consequently improve the intermodulation performance that is attainable by significant amount.

It is proposed that some of the feed-back signal is routed into a phase detector, which then transmits the phase information of the feed-back signal to the microprocessor. This phase measurement can then be compared against the phase of the transmitted signal (which is also measured). Any transmit data is suitable for use with this phase comparison. It is suggested that for continuous operation mode within current TDMA frame structures, that measuring the phase shift of the synchronisation word is a good option.

//

Phase shift measurement during the synchronisation word is carried out at the beginning of a timeslot when the synchronisation word is transmitted in terms of predetermined I and Q samples being input to linearizer 10. These
5 predetermined I and Q samples can be used for comparison with the corresponding samples measured by downconverter 14. Thus, the phase shift measurement is carried out during transmission of the synchronisation word.

The overall arrangement described provides the
10 advantages of:

(1) providing a method of "clip detection" by measuring the splattered power transmitted into the adjacent channel as part of a training process or as a real-time measurement of the intermodulation performance of the loop:

15 (2) providing an alternative method of measuring the phase shift around the feedback loop during continuous operation and during a training process and

(3) maximising the operating efficiency of the power amplifier by operating as close as possible to its saturation
20 level whilst maintaining a satisfactory intermodulation ratio performance.

Instead of using Cartesian feedback, predistortion feedback can be used as described in the paper "Linear Amplification Technique for Digital Mark Communications" by
25 Yoshinori Nagata 1989 IEEE. In this case parameters other than gain and phase will be stored in the look-up table. Instead, I and Q sample predistortion factors or parameters will be stored.

12
CLAIMS

1. A radio transmitter comprising:
a power amplifier;
5 linearizing means for compensating for non-linearity in
the power amplifier; and
feedback means for feeding a signal from an output of
the power amplifier to the linearizing means for maintaining
linearity, said amplifier, linearizing means and feedback
10 means forming a loop having adjustable loop linearization
parameters;
a look-up table for storing predetermined loop
linearization parameters;
and control means having an operating condition input,
15 said control means being coupled to the look-up table and the
loop for selecting a loop linearization parameter in response
to a transmit control signal according to an operating
condition input to the central means at the time of receipt
of the transmit control signal.
20
2. A radio transmitter according to claim 1, wherein the
operating condition input is coupled to sensing means for
sensing at least one of frequency, battery level and
temperature.
25
3. A radio transmitter according to claim 1 or 2 further
comprising means for monitoring the actual loop linearization
parameter, means for selecting an improved linearization
parameter and means for writing the improved parameter into
30 the look-up table.
4. A radio transmitter according to claim 3, wherein the
means for monitoring the loop linearization parameter
comprises receiver means tuned to an adjacent transmit
35 channel for measuring signals on the adjacent transmit
channel originating from the power amplifier.
5. A radio according to claim 4, wherein the receiver means
comprise a receiver switchable between a first receive

13

frequency which is separated from the frequency of the signal from the power amplifier by a duplex separation frequency and a second frequency which represents the frequency of a channel adjacent that of the signal from the power amplifier.

5

6. A radio according to claim 5 further comprising control means for switching the receiver between a receive frequency on a receive timeslot and an adjacent channel frequency on a transmit timeslot and back to the receive frequency on a subsequent receive timeslot.

10

7. A radio according to claim 5 or 6 further comprising attenuator means switchable into a path between the power amplifier and the receiver for attenuating the signal from the power amplifier to the receiver during transmission and for passing an unattenuated signal from the antenna during a receive mode of operation.

15

8. A radio according to claim 2 further comprising means for inputting a training sequence into the linearizing means, monitoring the actual loop linearization parameter in response to the training sequence and selecting an improved linearization parameter in response to the monitoring.

20

9. A radio transmitter circuit comprising:
a power amplifier coupled to an antenna for transmission of radio signals on a transmit channel;

25

linearizer means for compensating for non-linearity in the power amplifier; characterized by

30

adjacent channel receiving means tuned to a channel adjacent the transmit channel for measuring signals from the power amplifier appearing on the adjacent channel and means for adjusting the linearizer means in response to signals measured on the adjacent channel.

35


10. A radio according to claim 9 further comprising means for outputting a training sequence from the power amplifier;

14

a feedback circuit for feeding the training sequence output from the power amplifier back to the linearizer means to adjust the linearizer means; and

5 means for switching the signal from the power amplifier to the adjacent channel receiving means while the training sequence is being output from the power amplifier.

11. A radio according to claim 10 further comprising means for transmitting a synchronization sequence for providing
10 timing information to a receiving radio and means for using the synchronization sequence as a training sequence and training to the synchronization sequence.

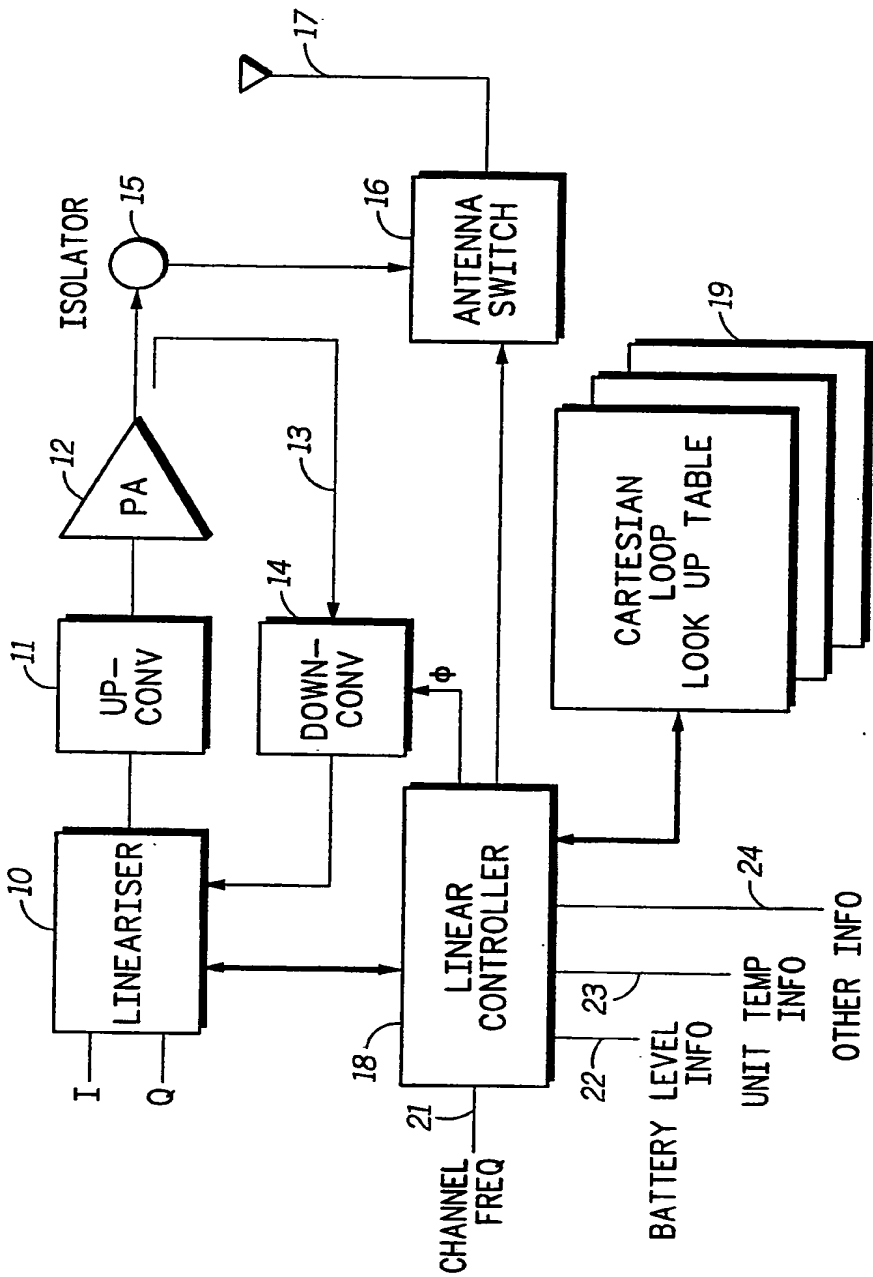

LINEARISER BLOCK DIAGRAM
FIG. 1

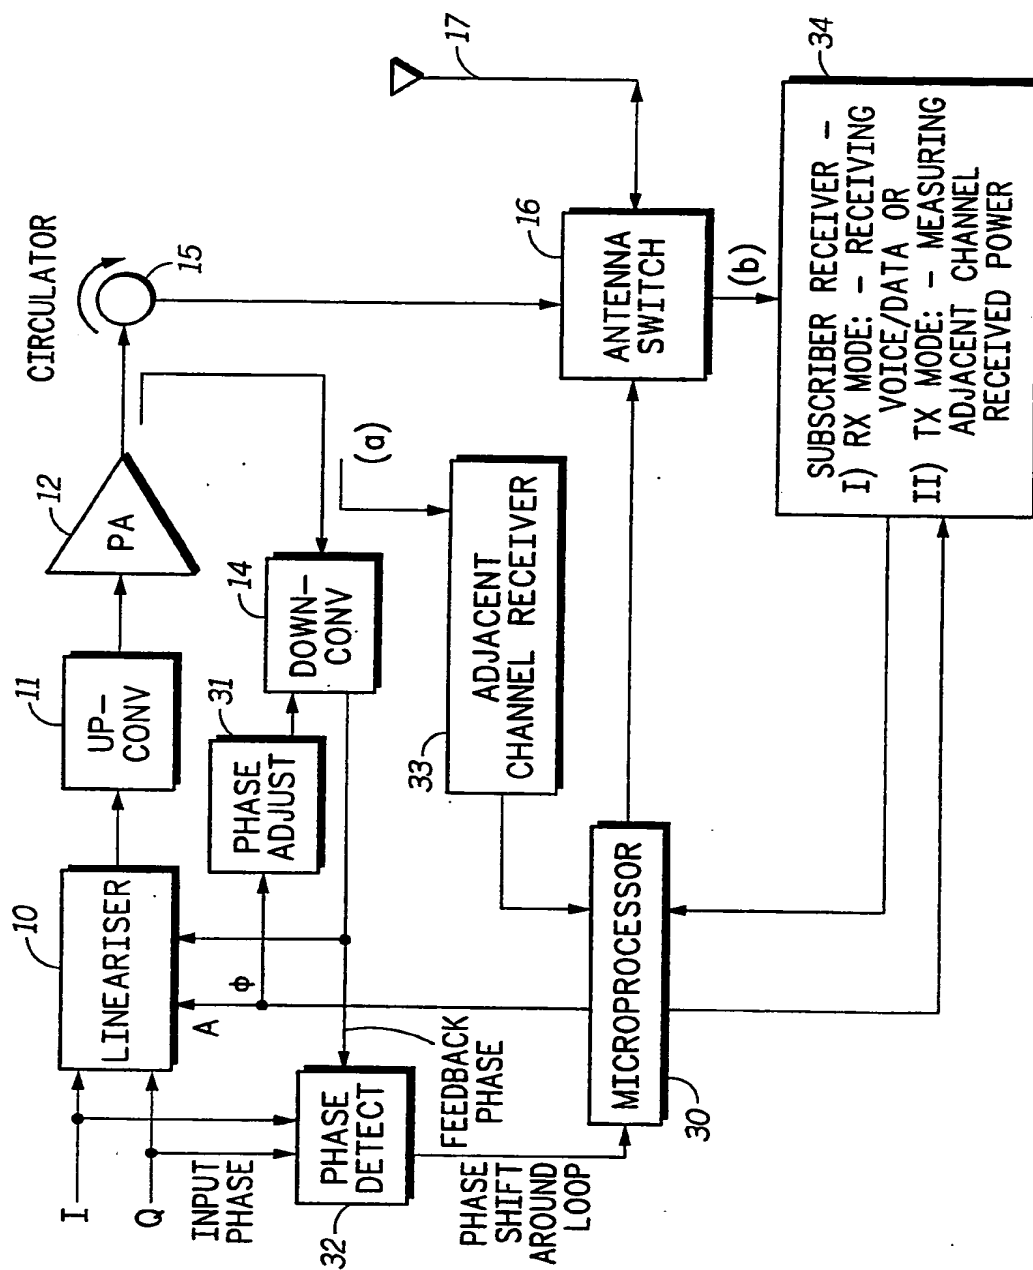
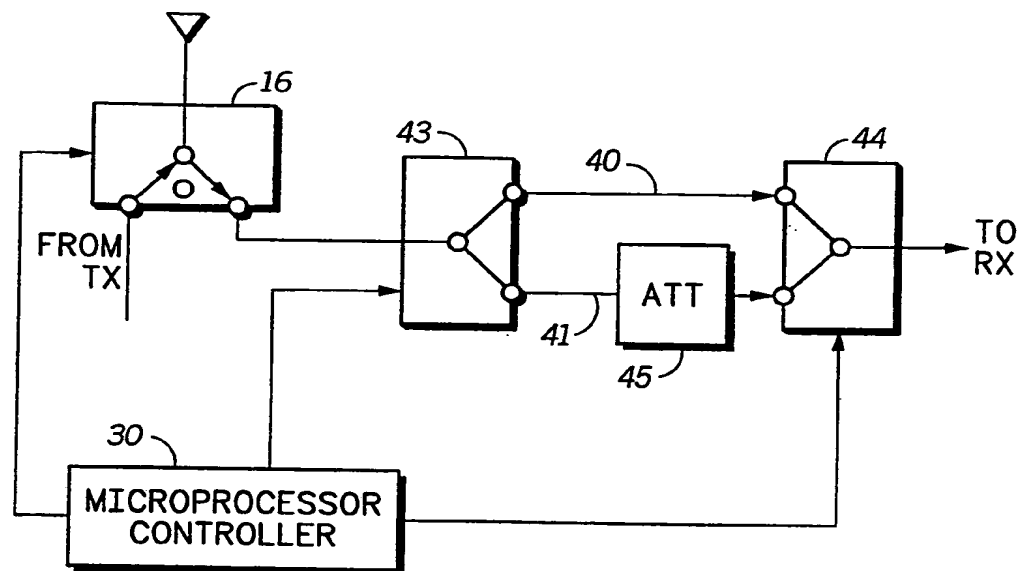
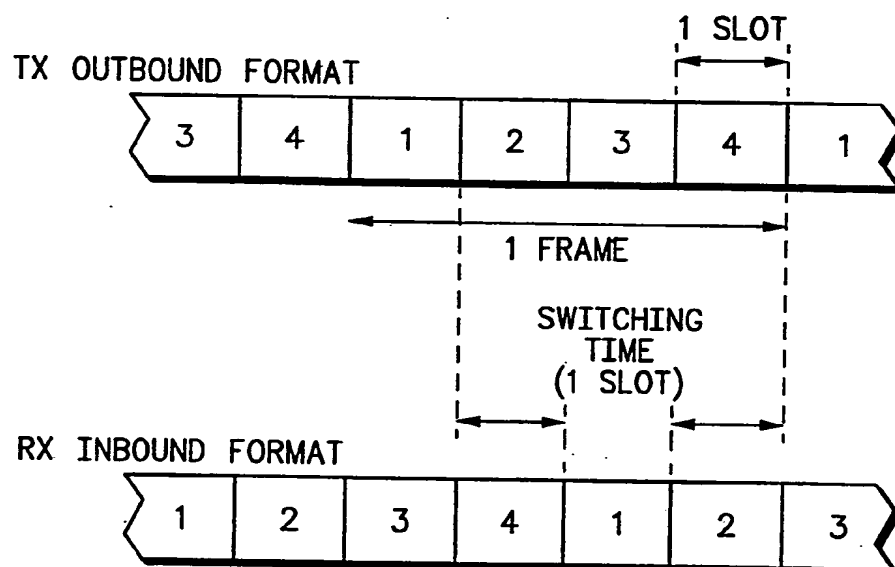


FIG. 2

3/3

*FIG. 3**FIG. 4*

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 93/00430

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl. 5 H03F1/32		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	H03F ; H04L ; H04B	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
Y	40TH IEEE VEHICULAR TECHNOLOGY CONFERENCE 9 May 1990, ORLANDO, FLORIDA pages 35 - 40 , XP203781 FAULKNER ET AL. 'Adaptive Linearisation Using Pre-distortion' see page 36, column 2, line 26 - page 37, column 1, line 36 see page 38, column 1, line 21; figure 1 ---	1-3
Y	IEE PROCEEDINGS-H vol. 138, no. 1, February 1991, STEVENAGE, HERTS., GB pages 9 - 12 , XP204587 'Memory controlled feedforward lineariser suitable for MMIC implementation' see page 1, line 10 - line 20; figure 3 ---	1-3
-/--		
<p>¹⁰ Special categories of cited documents : ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
01 JUNE 1993	0 7. 06. 93	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	WALDORFF U.	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category °	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	<p>IEEE TRANSACTIONS ON VEHICULAR TECHNOLOGY vol. 39, no. 4, November 1990, NEW YORK, US pages 374 - 382 , XP173256 JAMES K. CAVERS 'Amplifier Linearization Using a Digital Predistorter with Fast Adaptation and Low Memory Requirements' see page 380, column 1, line 31 - page 382, column 1, line 6; figure 5 ---</p>	1,3
A	<p>IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE vol. 1, 1 December 1986, HOUSTON, TX pages 126 - 132 K. SAM SHANMUGAN ET AL. 'An Adaptive Linearizer for 16-QAM Transmission over Non-linear Satellite Channels' see page 127, column 2, line 42 - line 60; figure 3 ---</p>	6-8
X	<p>41TH VEHICULAR TECHNOLOGY CONFERENCE 19 May 1991, ST. LOUIS, MO pages 753 - 758 , XP260272 S.P.STAPLETON ET AL. 'A New Technique for Adaptation og Linearizing Predistorters' see page 753, column 1, line 1 - page 754, column 1, line 5 see page 756, column 1, line 12 - column 2, line 20; figure 2 ---</p>	9
A	<p>see page 753, column 1, line 1 - page 754, column 1, line 5 see page 756, column 1, line 12 - column 2, line 20; figure 2 ---</p>	4
A	<p>EP,A,0 253 482 (MARCONI INSTRUMENTS LIMITED) 20 January 1988 see page 2, line 3 - line 9 ---</p>	4,9
A	<p>US,A,5 066 923 (PAUL H. GAILUS) 19 November 1991 cited in the application see column 3, line 7 - line 33 see column 5, line 25 - line 35 -----</p>	10,11

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

EP 9300430
SA 70476

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 01/06/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0253482	20-01-88	GB-A- 2191660	16-12-87
		DE-A- 3774629	02-01-92
		JP-A- 62299126	26-12-87
		US-A- 4810960	07-03-89

US-A-5066923	19-11-91	AU-A- 8903391	26-05-92
		CN-A- 1061123	13-05-92
		EP-A- 0507926	14-10-92
		WO-A- 9208280	14-05-92

EPO FORM P0419

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82